

Fire windows EI30/EI60



Fire windows with the same look as the rest of our assortment - fixed frames



Burn-through time:
40 - 70 minutes



U-value for the entire window: 0,9-1,0 W/m² K



Weight:
Approx. 54 kg/m²



Noise reduction:
Up to 40 dB Rw+Ctr



Max. size:
4,1 m² per element



Types of wood:
Pine wood or any other heavier sort of wood



Materials:
Wood & wood/aluminium



Classification:
From the outside: EI30
From the inside: EI60

// ELEGANT DESIGN

The fire windows have the same look and design as our other façade doors and windows.

// OPTIONAL TYPE OF WOOD

The windows are supplied in a type of wood of your own personal choosing. However, the only requirement is that the preferred wood species is heavier than pine wood.

// INTEGRATED ELEMENTS

The fire windows can be built together as entire glass walls at infinite length.

// PROFESSIONAL CALCULATION

We should be happy to make our expertise available to you and help you find the optimal solution in accordance with current legislation

// EASY MAINTENANCE

The outer aluminium part ensures a long life and minimal maintenance.

// NOISE REDUCTION

Excellent noise-reducing properties ensure peace and quiet indoors even if the nearest neighbour is a very busy road.

// GREAT FLEXIBILITY

The window are also made in wood or a combination of wood/aluminium with adhesive bars in 31 mm width.

// TESTET AND APPROVED SOLUTIONS

The fire windows meet the strictest requirements and have been tested at The Danish Institute of Fire and Security Technology.



Fire windows EI30/EI60


Reference pictures



FIRE WINDOWS // DBI TEST



FIRE WINDOWS // OAK

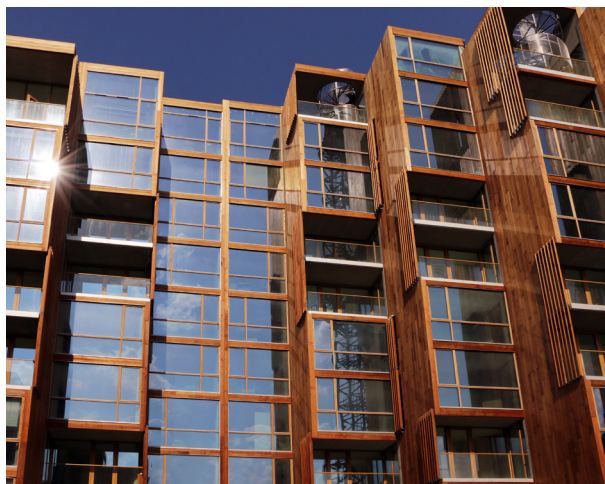

FIRE WINDOWS // WOOD/ALUMINIUM



FIRE WINDOWS // WOOD/ALUMINIUM

